



City Lights ART GALLERY

Providing local art & art education
More information at CityLightsArtGallery.org

How to prepare your art for exhibit

Gallery hanging method requires certain hardware on your frames. Please take a moment to make sure your art is properly prepared.

For Wood Frames:

Wire is to be installed with **d-rings**. Make sure your d-rings are in the wood securely. Attach the hardware about 1/3rd down from the top of the frame or canvas. Wire must be tight across and must hold the weight of your art. Tie and twist your wire so it will not pull out and

No saw tooth hangers nor wire attached to saw tooth will be accepted. Crimped wire is not allowed.



Supplies: D-rings, screws, wire from frame or hardware store (the wire may be plastic coated).

For Metal Frames:

Wire is to be installed with “**screw in hanger**” hardware that slides into the frame rail. Screws are used to adjust and tighten the wires hardware.

Attach the “screw in hanger” about 1/3rd down from the top of the metal frame. It must hold the weight of your art. Tie and twist your wire so it will not pull out.

Supplies: Screw in hanger, screws, wire from frame or hardware store (the wire may be plastic coated).

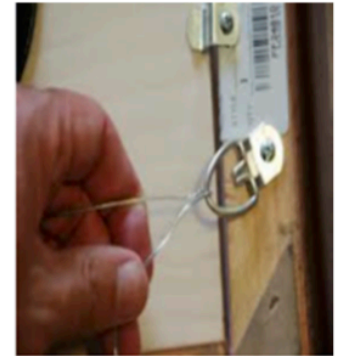

Screw in Hanger
for Metal Frame

Metal Frame

